



# User Manual

*Pro Blue Rack*  
*800-2000VA*

*Uninterruptible Power Supply*



# INDEX

1. Package contents.....	2
2. Safety instructions .....	2
3. Specifications .....	3
4. Product description .....	3
4.1. Front panel .....	3
4.2. LCD panel .....	4
4.3. Back panel .....	4
5. Installation & initial start-up.....	4
5.1. Placement & storage conditions.....	4
5.2. Connect to utility & charging.....	4
5.3. Connect the loads.....	5
5.4. Connect the communication cable.....	5
5.5. Turn ON/OFF.....	5
6. Software download & installation.....	5
7. Trouble shooting .....	5

---

## 1. PACKAGE CONTENTS

You should have received the following items inside of package:

- UPS Unit
- Quick Guide
- Communication cable
- Power cable

## 2. SAFETY INSTRUCTIONS

- To prevent the risk of fire or electric shock, install in a temperature and humidity controlled indoor area free of conductive contaminants. (See the specifications for the acceptable temperature and humidity range.)
- To reduce the risk of overheating the UPS, do not cover the UPS' cooling vents and avoid exposing the unit to direct sunlight or installing the unit near heat emitting appliances such as space heaters or furnaces.
- Do not attach non-computer-related items, such as medical equipment, life-support equipment, microwave ovens, or vacuum cleaners to UPS.
- Do not plug the UPS input into its own output.
- Do not allow liquids or any foreign object to enter the UPS. Do not place beverages or any other liquid-containing vessels on or near the unit.
- In the event of an emergency, press the OFF button and disconnect the power cord from the AC power supply to properly disable the UPS.
- Do not attach a power strip or surge suppressor to the UPS.


- If the UPS is with metal chassis, for safety purpose, grounding is a must during UPS installation in order to reduce leakage current below 3.5mA.  
**Attention!** Hazardous through electric shock. Also with disconnection of this unit from the mains, hazardous voltage still may be accessible through supply from battery. The battery supply should be therefore disconnected in the plus and minus pole at the quick connectors of the battery when maintenance or service work inside the UPS is necessary.
- Servicing of batteries should be performed or supervised by personnel knowledgeable of batteries and the required precautions. Keep unauthorized personnel away from batteries.
- When replacing the batteries, use the same number and type of batteries.
- Internal battery voltage is 12VDC. Sealed, lead-acid, 6-cell battery.
- Do not dispose of batteries in a fire. The battery may explode. Do not open or mutilate the battery or batteries. Released electrolyte is harmful to the skin and eyes.
- Unplug the UPS prior to cleaning and do not use liquid or spray detergent.
- A battery can present a risk of electric shock and high short circuit current. The following precaution should be observed before replacing batteries:
  - 1) Remove watches, rings, or other metal objects.
  - 2) Use tools with insulated handles.
  - 3) Wear rubber gloves and boots.
  - 4) Do not lay tools or metal parts on top of batteries.
  - 5) Disconnect charging source prior to connecting or disconnecting batteries terminal.

### 3. SPECIFICATIONS


Model	600	800	1K	2K	3K
Capacity	600VA/ 360W	800VA/ 480W	1000VA/ 600W	2000VA/ 1200W	3000VA/ 1800W
INPUT					
Voltage	220/230/240 VAC				
Voltage Range	162-290 VAC				
OUTPUT					
Voltage Regulation	+/-10%				
Transfer Time	Typical 2-6 ms, 10 ms max.				
Waveform	Simulated Sine Wave				
BATTERY					
Type & Number	12V/7 AH x 1	12V/9 AH x 1	12V/7 AH x 2	12 V/9 AH x 2	12V/7 AH x 4
Charging Time	4-6 hours recover to 90% capacity				
PHYSICAL					
Dimension (DxWxH) mm	230 x 438 x 86		300 x 438 x 86		470 x 438 x 86
Net Weight (kg)	6.5	7.7	11.3	14.4	23.6
ENVIRONMENT					
Humidity	0-90 % RH @ 0-40°C (non-condensing)				
Noise Level	Less than 40 dB				
MANAGEMENT					
USB	Supports Windows® family, Linux, Unix and MAC				

### 4. PRODUCT DESCRIPTION

#### 4.1. Front panel




## 4.2. LCD panel

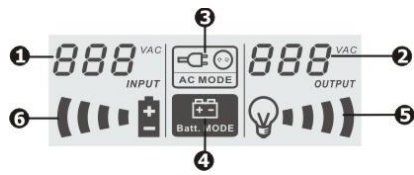

- ① Input voltage
- ② Output voltage
- ③ AC mode indicator
- ④ Battery mode indicator
- ⑤ Load level indicator, flashing indicates overload
- ⑥ Battery capacity indicator, flashing indicates low battery

## 4.3. Back panel

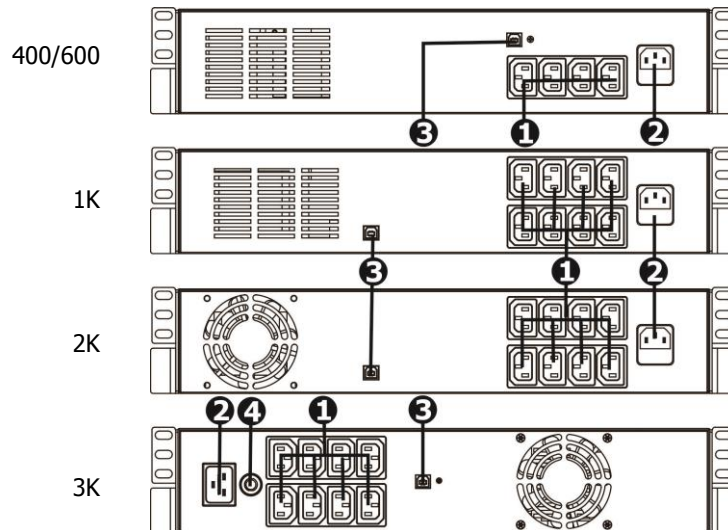

- ① Output receptacles
- ② AC input
- ③ USB com. Port
- ④ Circuit breaker

## 5. INSTALLATION & INITIAL START-UP

**NOTE:** Before installation, please inspect the unit. Be sure that nothing inside the package is damaged.

### 5.1. Placement & storage conditions

Install the UPS in a protected area that is free of excessive dust and has adequate air flow. Please wall-mount the UPS into 19" chassis. Do NOT operate the UPS where the temperature and humidity is outside the specific limits. (Please check the specs for the limitations.)



### 5.2. Connect to utility & charging

Plug in the AC input cord to the wall outlet. For the best results, suggest to charge the battery at least 6 hours before initial use. The unit charges its battery while connecting to the utility.



**6 hours**

### 5.3. Connect the loads

Plug in the loads to output receptacles on the rear panel of the UPS. Simply turn on the power switch of UPS unit, then devices connected to the UPS will be protected by UPS unit.

**CAUTION: NEVER** connect a laser printer or scanner to the UPS unit. This may cause the damage of the unit.



### 5.4. Connect the communication cable

To allow for unattended UPS shutdown/start-up and status monitoring, connect the communication cable one end to the USB port and the other to the communication port of your PC. With the monitoring software installed, you can schedule UPS shutdown/start-up and monitor UPS status through PC.

### 5.5. Turn ON/OFF

Turn on the UPS unit by pressing the power switch. Turn off the UPS unit by pressing again the power switch.

## 6. SOFTWARE DOWNLOAD & INSTALLATION

Please follow steps below to download and install monitoring software:

1. Go to the website <http://www.power-software-download.com>
2. Click ViewPower software icon and then choose your required OS to download the software.
3. Follow the on-screen instructions to install the software.
4. When your computer restarts, the monitoring software will appear as an orange plug icon located in the system tray, near the clock.

## 7. TROUBLE SHOOTING

Use the table below to solve minor problems.

Problem	Possible Cause	Solution
No words display on the front panel.	Low battery.	Charge the UPS at least 6 hours.
	Battery fault.	Replace the battery with the same type of battery.
	The UPS is not turned on.	Press the power switch again to turn on the UPS.
Alarm continuously sounds when the mains is normal.	The UPS is overload.	Remove some loads first. Before reconnecting equipment, please verify that the load matches the UPS capability specified in the specs.
When power fails, back-up time is shorten.	The UPS is overload.	Remove some critical load.
	Battery voltage is too low.	Charge the UPS at least 6 hours.
	Battery defect. It might be due to high temperature operation environment, or improper operation to battery.	Replace the battery with the same type of battery.
The mains is normal Bu the unit is on battery mode.	Power cord is loose.	Reconnect the power cord properly.

\*\*\*\*\*