



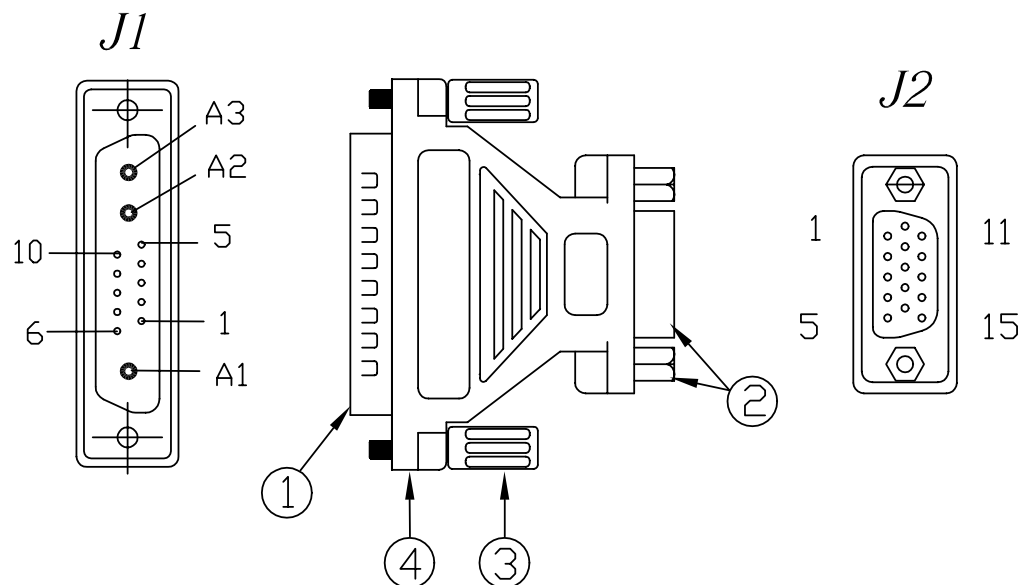

WORKMANSHIP:

EACH CONNECTOR SHELL
SHOULD BE SHIELDED WITH
CU FOIL & 360° SOLDERING.

*** PINOUT DIAGRAM ***

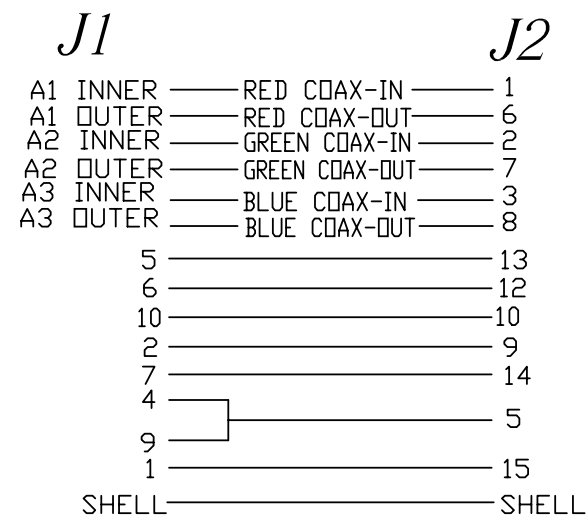

BILL OF MATERIAL

④	45P PVC, BLACK COLOR	10.0g
③	THUMB SCREW: UNC#4-40, TS4*33.0. BLACK COLOR PVC MOLDING.	2 pcs
②	HDB 15P FEMALE SOLDERING TYPE.(W/NUT) INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD FLASH.	1 pcs
①	13W3 MALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD PLASH.	1 pcs
NO.	SPECIFICATION	Q'TY

MOLD DESIGN LIST:

J1 & J2:

DW078(OUT)
DW077(IN)

REVISION LIST			DRAWG BY		TOLERANCE: .XX= .XXX=	SCALE: NONE	PART NO:	DWG NO:	REV:
REV	DESCRIPTION	DATE							
A	INITIAL RELEASE OF DWG	JUN.16.2001	CHECK BY		 	UNIT: mm	CUST NO:	CK106063	A
			APPROVED BY		CUST APPROVED		TITLE :	SHEET 1 OF 1	
							13W3m to VGAf Adaptor		