


PACKING DETAIL:
(1PCS / BAG)

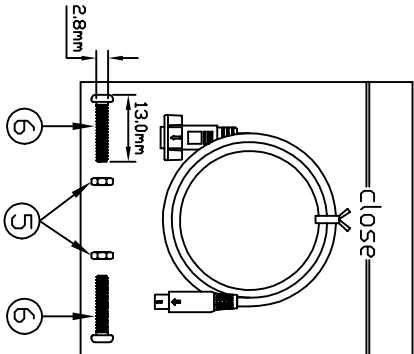

*** PINOUT DIAGRAM ***

J1 J2

1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
SHELL	_____	SHELL

BILL OF MATERIAL

⑥	SCREW: UNC#4-40, 2.8*13.0,	2 pcs
⑤	NUT SCREW: UNC#4-40, 4.75*1.9	2 pcs
④	45P PVC, GRAY COLDR .	9.0 g
③	MINI DIN 6P MALE SOLDERING TYPE. INSULATION: PBT, BLACK COLDR. CONTACT: BRASS, TIN-PLATED.	1 pcs
②	MINI DIN 6P FEMALE SOLDERING TYPE. INSULATION: PBT, BLACK COLDR. CONTACT: BRASS, GOLD FLASH.	1 pcs
①	NON-UL 28AWG*6C+DRAIN+AL FOIL. CABLE OD: 5.0mm, JACKET GRAY COLDR	2000mm
NO	SPECIFICATION	Q'TY

MOLD DESIGN LIST:
J1: DW315(OUT) DW047(IN)
J2: DW057(OUT) DW047(IN)

REVISION LIST			DRAWG BY		SCALE: NONE		PART NO:	DWG NO:		REV:	
REV	DESCRIPTION	DATE			.XX= .XXX=		CUST NO:	CK306047		A	
A	INITIAL RELEASE OF DWG	JUN.10.2003	CHECK BY		UNIT: mm		TITLE :	MD6F /MD6M		SHEET 1 OF 1	
			APPROVED BY		CUST APPROVED						