


2000±30mm

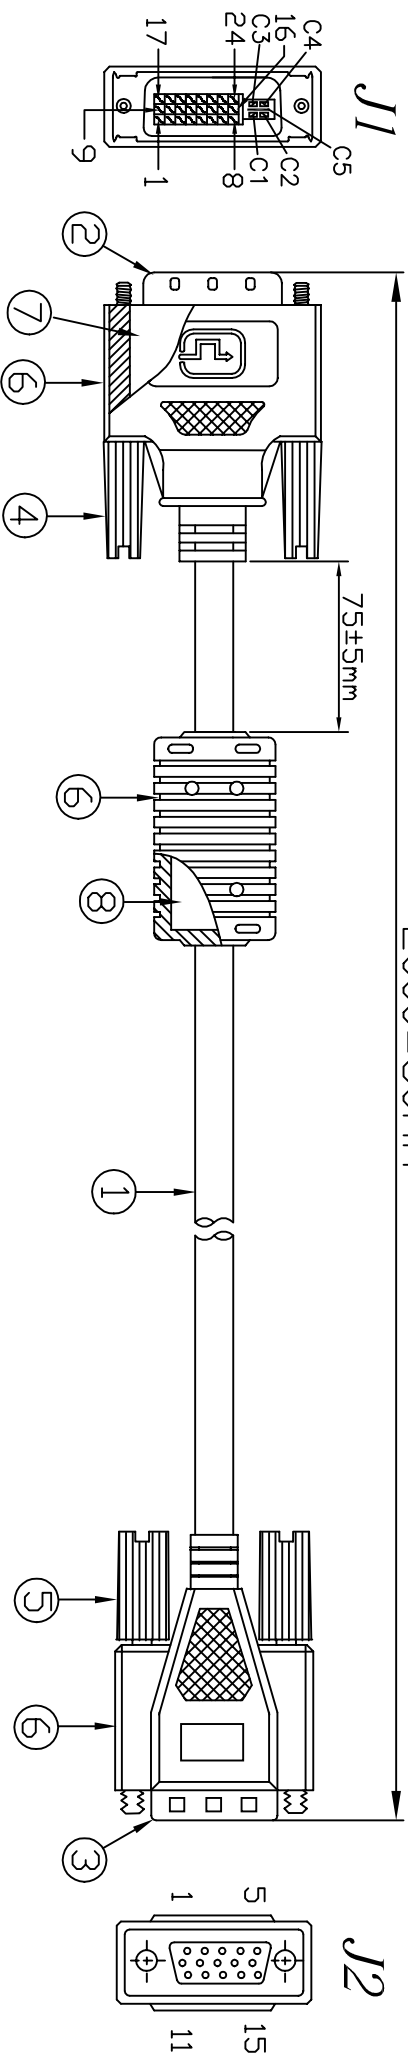

PACKING DETAIL:

PINOUT DIAGRAM ***

BILL OF MATERIAL

(1) 1PCS / PE BAG.

⑧	FERRITE CORE: 28.5mm*17.5mm*9.5mm.	1 pcs
⑦	TINPLATE. (馬口鐵), OD: 8.0mm.	1 pcs
⑥	45P PVC, GREY COLOR.	49.5 g
⑤	THUMB SCREW: UNC#4-40, AD4×30.5. GREY COLOR MOLDING.	2 pcs
④	THUMB SCREW: UNC#4-40, AD4×29.5. GREY COLOR MOLDING.	2 pcs
③	HDB 15P MALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD FLASH.	1 pcs
②	DVI-I (24+5)P MALE SOLDERING TYPE. INSULATION: PBT, WHITE COLOR. CONTACT: BRASS, GOLD FLASH.	1 pcs
①	UL20276 30AWG*3CDEAX+28AWG*1P+28AWG*5C+AB. CABLE OD: 7.0±0.15mm, JACKET GREY COLOR.	2000mm

NOTES:

- (1) 100% SHORT OPEN & MIS WIRE TEST
- (2) CONTACT RESISTANCE 3 DHMS MAX.
- (3) INSULATION RESISTANCE 20M DHMS MIN
- (4) HI-POT VOLTAGE 300V DC

(1) 1PCS / PE BAG.

NOTES:

(1) 100% SHORT OPEN & MIS WIRE TEST
 (2) CONTACT RESISTANCE 3 OHMS MAX.
 (3) INSULATION RESISTANCE 20M OHMS MIN
 (4) HI-POT VOLTAGE 300V DC

MOLD DESIGN LIST:

Part No.	Part Name	Part Description	Part Quantity	Part Unit	Part Material	Part Color	Part Finish	Part Drawing	Part Remark
J1	J1	J1	1	1	J1	1	1	1	1
C1	C1	C1	1	1	C1	1	1	1	1
C5	C5	C5	6	6	C5	6	6	6	6
C2	C2	C2	2	2	C2	2	2	2	2
C5	C5	C5	7	7	C5	7	7	7	7
C3	C3	C3	3	3	C3	3	3	3	3
C5	C5	C5	8	8	C5	8	8	8	8
6	6	6	15	15	6	15	15	15	15
7	7	7	12	12	7	12	12	12	12
8	8	8	14	14	8	14	14	14	14
14	14	14	9	9	14	9	9	9	9
16	16	16	5	5	16	5	5	5	5
15	15	15	10	10	15	10	10	10	10
C4	C4	C4	13	13	C4	13	13	13	13
SHELL	SHELL	SHELL			SHELL				

NO.	DESCRIPTION	Q'TY
-----	-------------	------

CORE: DW191

--

REVISION LIST		DRAWG BY	TOLERANCE:	SCALE:	PART NO:	DWG NO:	REV:
REV	DESCRIPTION				DATE		

INITIAL RELEASE OF DWG	JUN.11.2003	CHECK BY		.XX=	NONE	CK306048	A
A				.XXX=			

	CHECK BY		UNIT: mm	TITLE :	SHEET 1 OF 1
	APPROVED BY				