


*** PINOUT DIAGRAM ***

J1 J2 J3

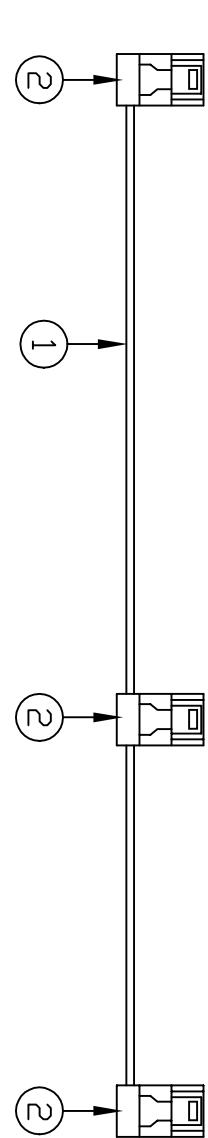

BILL OF MATERIAL

| | | |
|-----|---|-------|
| (1) | I.D.C SOCKET 40P WITH CENTER POLARIZATION, AND WITHOUT S/R & NOSE,(兩件式) INSULATOR: PBT GLASS-FIBER REINFORCED UL94V-0, CONTACT: BRONZE GOLD FLASH OVER NICKEL, | 3 pcs |
| (2) | FLAT CABLE UL2651 28AWG(7/0.127mm) HF-40P, OD: 0.9*0.127mm JACKET GRAY COLOR, | 1 m |

NO. SPECIFICATION

Q'TY

| REV | DESCRIPTION | DRAWG BY | TOLERANCE: .XX = .XXX = | SCALE: NONE | PART NO: | DWG NO: | REV: |
|-----|------------------------|-------------|----------------------------|----------------|----------------|--------------|------|
| A | INITIAL RELEASE OF DWG | NOV.17.2001 | CHECK BY | | CK111062 | A | |
| | | | | | UNIT: | TITLE : | |
| | | | | mm | HDD FLAT CABLE | SHEET 1 OF 1 | |