


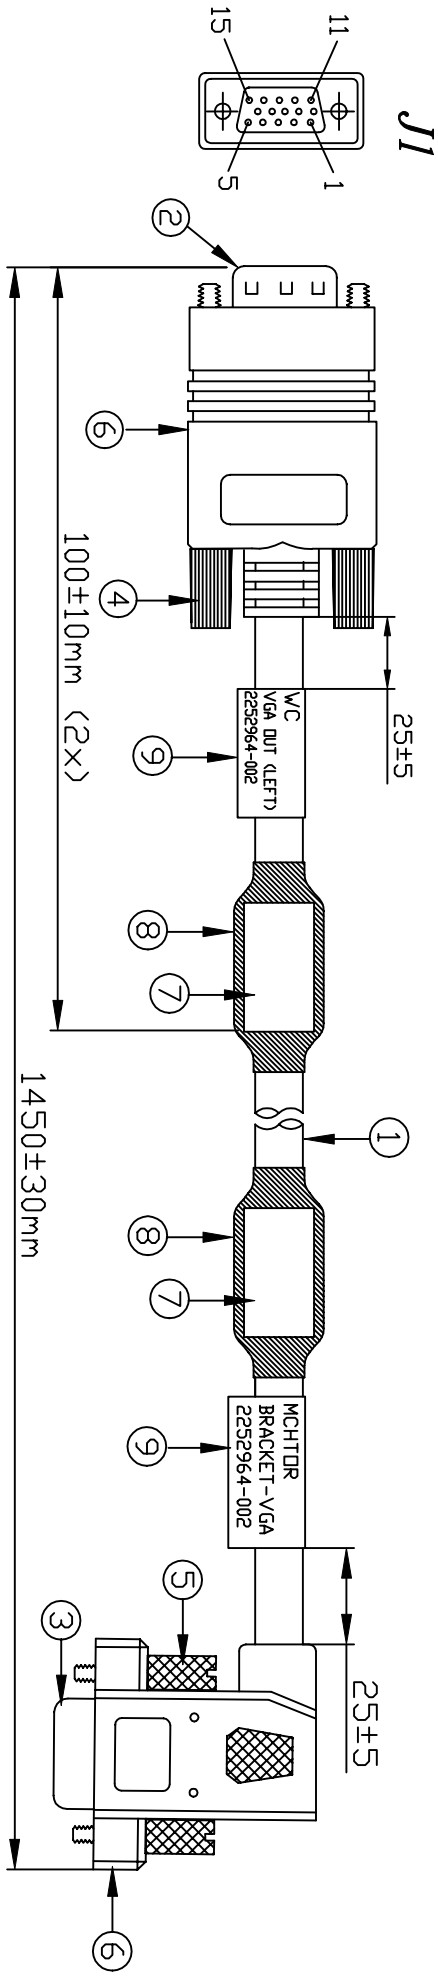

BILL OF MATERIAL

⑨	LABEL: 1"(L)*0.5"(W)	2 pcs
⑧	HEAT SHRINK TUBE, BLACK COLOR.	120mm
⑦	FERRITE CORE: 16.0(OD)*9.0(ID)*28.0(L)mm	2 pcs
⑥	45P PVC, BEIGE COLOR	49.0g
⑤	THUMB SCREW: UNC#4-40, TS2*10.8, TOTAL LENGTH=20.8mm.	2 pcs
④	THUMB SCREW: UNC#4-40, AG4*40.5 BEIGE COLOR MOLDING.	2 pcs
③	HDB 15P FEMALE CRIMPING TYPE. INSULATION: PBT, BLACK COLOR. TERMINAL: BRASS, GOLD FLASH.	1 pcs
②	HDB 15P MALE CRIMPING TYPE. INSULATION: PBT, BLACK COLOR. TERMINAL: BRASS, GOLD FLASH.	1 pcs
①	UL2919 3COAXIAL(UL1354S)+24AWG*4C+AEB, CABLE OD: 8.0mm, JACKET BEIGE COLOR.(GEAR)	1450mm
NO	SPECIFICATION	Q'TY

REVISION LIST		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE OF DWG	NOV.05.2000

MOLD DESIGN LIST:
J1: DW010(OUT)
DW007(IN)
J2: DW318(OUT)
DW317(IN)

TOLERANCE:		
.XX=	.XXX=	

PART NO: S048143	DWG NO: C2K09069	REV: A
CUST NO: 2252964-ADW		
TITLE : VGA OUT CABLE		

WORKMANSHIP:
EACH CONNECTOR SHELL SHOULD BE SHIELDED WITH CU FOIL & 360° SOLDERING.

