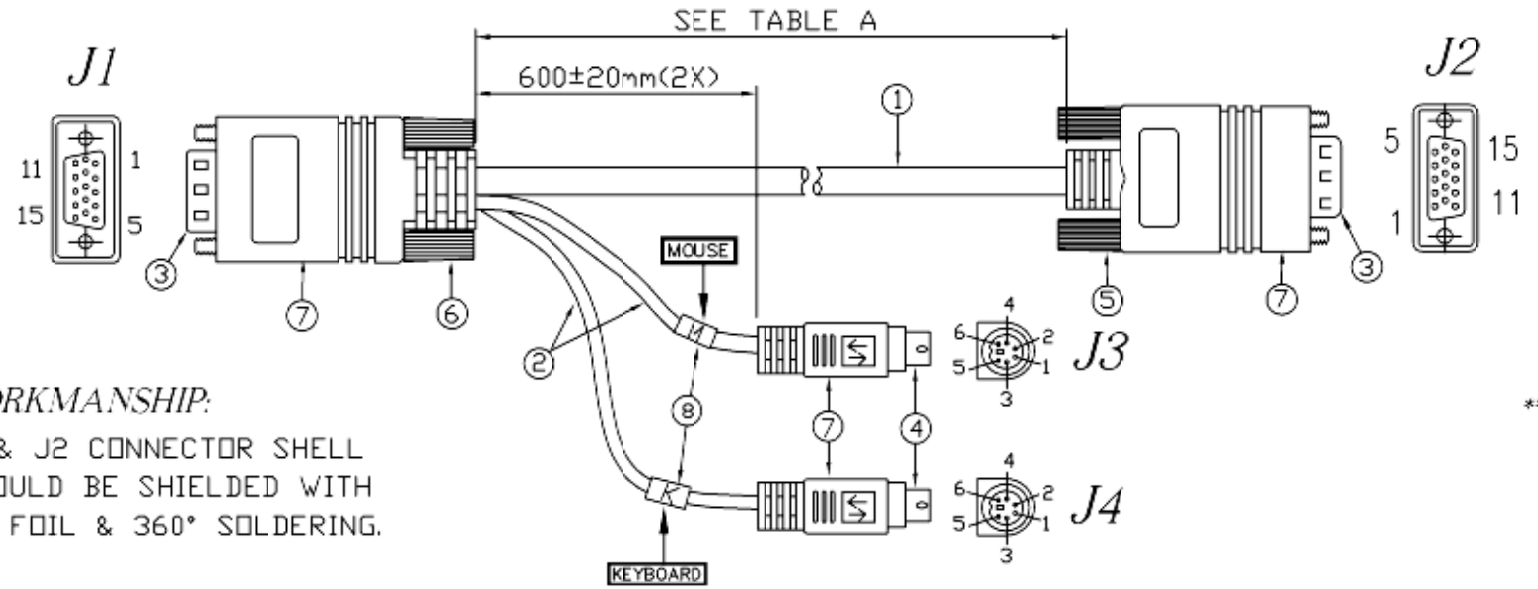

* WORKMANSHIP:

J1 & J2 CONNECTOR SHELL SHOULD BE SHIELDED WITH CU FOIL & 360° SOLDERING.

*** PINOUT DIAGRAM ***

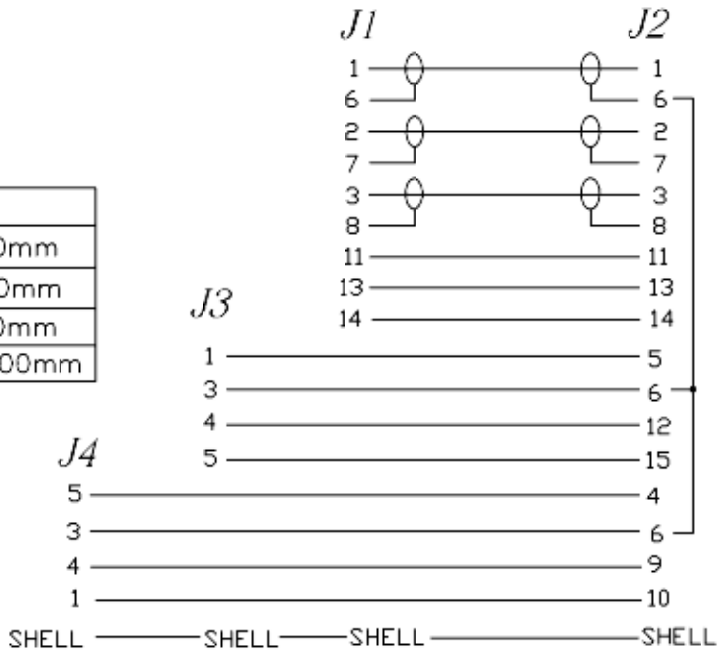

TABLE A

CUST NO	LENGTH
SETCABLE-5/2M	2000±30mm
SETCABLE-5/3M	3000±50mm
SETCABLE-5/5M	5000±50mm
SETCABLE-5/10M	10000±100mm

BILL OF MATERIAL

NO	SPECIFICATION	Q'TY
⑧	LABEL+TRANSPARENT TUBE(OD: 5.0mm)	2 pcs
⑦	45P PVC, BEIGE COLOR	52.0 g
⑥	THUMB SCREW: UNC#4-40, AG4*40.5, BEIGE COLOR MOLDING.	2 pcs
⑤	THUMB SCREW: UNC#4-40, AG4*41.0 BEIGE COLOR MOLDING.	2 pcs
④	MINI DIN 6P MALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, TIN-PLATED.	2 pcs
③	HIGH-DENSITY D-SUB 15P MALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD FLASH.	2 pcs
②	UL2464 28AWG*4C+AL FOIL+DRAIN+BRAID CABLE OD: 4.5mm, JACKET BEIGE COLOR.	680mm*2
①	UL2919 75ohm 28AWG 3COAXIAL(UL1354S)+26AWG*9C+AEB. CABLE OD: 8.5mm, JACKET BEIGE COLOR.	SEE TABLE A

MOLD DESIGN LIST:

J1: DW011(OUT) DW007(IN)

J2: DW010(OUT) DW007(IN)

J3 & J4: DW036(OUT) DW047(IN)

REVISION LIST

REV	DESCRIPTION	DATE
A	INITIAL RELEASE OF DWG	MAR.07.2001

DRAWG BY		TOLERANCE: .XX= .XXX=	SCALE: NONE	PART NO:	DWG NO: CK103019 / REV: A
CHECK BY			UNIT: mm	CUST NO: SETCABLE-5/xM	
APPROVED BY		CUST APPROVED		TITLE : HDB15M/HDB15M+MD6Mx2	SHEET 1 OF 1