

ONELAN NET-TOP-BOX: PRODUCT LINE UP

GENERAL	MILLENNIUM 	CENTURY 	CENTURY 	
TARGET APPLICATIONS	Premium stand-alone appliance or Publisher for a Digital Signage Network	Simple stand-alone appliance or Subscriber in a Digital Signage Network	Simple stand-alone appliance or Subscriber in a Digital Signage Network	

COMMON FEATURES	NTB5000/5	NTB610/615	NTB510P/510S	NTB500P/500S
Multi-Zone Media Player	User defined number and position of Zones			
Simple control	Web interfaced appliance – no user software required			
Full motion video	MPEG1,2,4 (DivX), AVI, QT, live analogue or digital TV, analogue TV input [1]			
Full Web page rendering	HTML, JavaScript, Flash™, Real™			
Stills, text, audio	Stills - GIF, TIFF, JPEG, PNG. Text - scrolling or static, RSS feeds. Audio - MP3, WAV			
High resolution output	User definable. 4x3, 5x4 and 16x9 aspect ratios and resolutions			
RSS Subscriber	Automatically collect and display dynamic textural feeds from Internet or Intranet			
Local media customisation	Optionally allow a local user (given a password) to customise what's displayed			
Linux based Player	Network secure, in-built Firewall, high availability, no anti-virus software required			
Unlimited network scalability	Via ONELAN in-built 'Channel Manager' media distribution mechanism			
Centrally manageable	Via ONELAN Digital Signage Manager (DSM). 1000+ players			
Streaming client options	MPEG/UDP/IP & Web streaming client - chargeable option. Server option Millennium/Century			
Self Health Monitoring	For key physical parameters, capacities and loadings			
Playout Logging	For Audit Trial purposes			
Multi-lingual	International fonts and language specific Web GUI. English, French, German, Italian, Spanish, Russian, Chinese, Japanese, Arabic			


PRODUCT FEATURES	NTB5000 / 5005	NTB610 / 615	NTB510P/510S	NTB500P/500S
Per Zone transparency	Yes	Yes		Yes
Number of Zones	Unlimited - 2 Video	Unlimited - 1 Video		Unlimited - 1 Video
Portrait mode	Yes	Yes		Yes
HD Media Player	Yes	No		No
Central Media Publisher	Yes	Yes		NTB510P
Local Layout editing / creation	Yes	Yes		Yes
Local Playlist editing	Yes	Yes		Yes
Video Zones	2	1		1
HTML Zones	Unlimited	Unlimited		Unlimited
Text, Stills and Audio Zones	Unlimited	Unlimited		Unlimited
TV Capture + analogue TV input	No / Yes	No / Yes		No

HARDWARE SPEC.	NTB5000/5005	NTB610/615	NTB510P/510S	NTB500P/500S
CPU Class	Intel Pentium Core 2 Duo	Intel Atom 1.6GHz		Intel Atom 1.6GHz
RAM	1024MBytes	1024MBytes		1024MBytes
Size (mm)	280x77x268	280x77x258	510 - 253 x 167 x 27	500 - 223x178x26
Mounting	Desktop or 2U Rack Mount – optional	Desktop or 2U Rack Mount – optional	VESA mount plate (supplied)	
Display Output	VGA	VGA	VGA	
Output resolution (maximum)	2048x1536	2048x1536	2048x1536	
RS232	Yes	Yes	510 - Yes	500 - No
Mains power supply / Consumption All 100-240 VAC 50-60Hz	180W Internal PSU with PFC / 55W	180W Internal PSU with PFC / 45W	100-240 VAC 50-60Hz via 36W mains to 12V adapter. Typical Consumption 12W	
TV Capture + CVBS/Y-C input	No / Internal	No / Internal	No	
Media Storage Type	HDD-3.5"-7200RPM-80G	HDD-3.5"-7200RPM-80G	510 - HDD-2.5"-5400RPM-160G or 32G Solid State Drive 500 - HDD-2.5"-5400RPM-160G	

Notes

1. Consult factory;

To find out more contact our appointed reseller/installer:

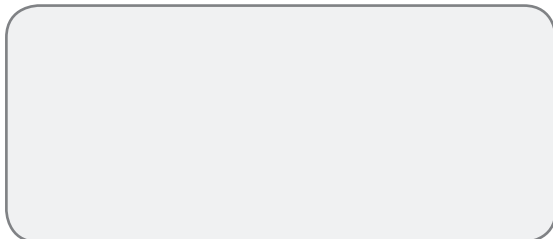

Distribution & Vertrieb:

U.T.E. Electronic GmbH & Co. KG - Friedrich-Ebert-Str. 112a - 58454 Witten

Tel.: +49 (0)2302 982035 - Fax.: +49 (0)2302 982036 - E-Mail: info@ute.de - Internet: www.ute.de

