


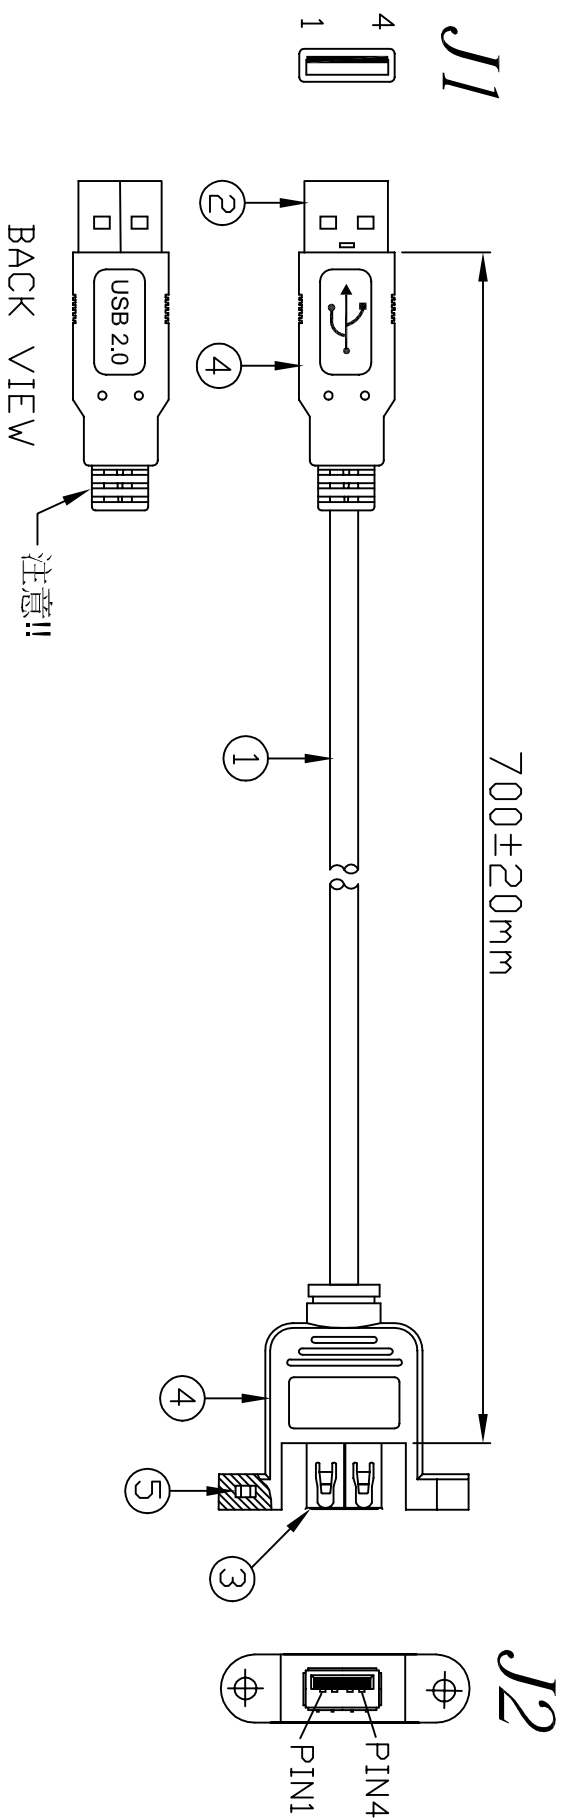

*** PINOUT DIAGRAM ***

J1 J2

- 1 ——— RED<24#> ——— 1
- 2 ——— WHITE<28#> ——— 2
- 3 ——— GREEN<28#> ——— 3
- 4 ——— BLACK<24#> ——— 4

SHELL ——— DRAIN+BRAID ——— SHELL

MOLD DESIGN LIST:

J1: DW337

J2: DW324

BILL OF MATERIAL

⑤	M3, 4.75mm*1.9mm.	2 pcs
④	45P PVC, WHITE COLOR.	12.5 g
③	USB A TYPE FEMALE SOLDERING TYPE. INSULATION: PBT, WHITE COLOR. CONTACT: BRASS, GOLD-PLATED<30u''>.	1 pcs
②	USB A TYPE MALE SOLDERING TYPE. INSULATION: PBT, WHITE COLOR. CONTACT: BRASS, GOLD-PLATED<30u''>.	1 pcs
①	<USB2.0> UL2725 28AWG*1P+24AWG*2C+AEB, CABLE OD: 5.0mm, JACKET WHITE COLOR.	700mm

NO.	SPECIFICATION	Q'TY
-----	---------------	------

REVISION LIST			DRAWG BY		TOLERANCE: .XX = .XXX =		SCALE: NONE	PART NO: S048799	DWG NO:	REV:	
REV	DESCRIPTION	DATE						CUST NO:	CK212038	A	
A	INITIAL RELEASE OF DWG	DEC.13.2002	CHECK BY				UNIT: mm	TITLE : USB2.0 CABLE			SHEET 1 OF 1
			APPROVED BY		CUST APPROVED						