


LTR	REV.	DESCRIPTION	DATE
	X	ORIGINAL RELEASE	12/18/01

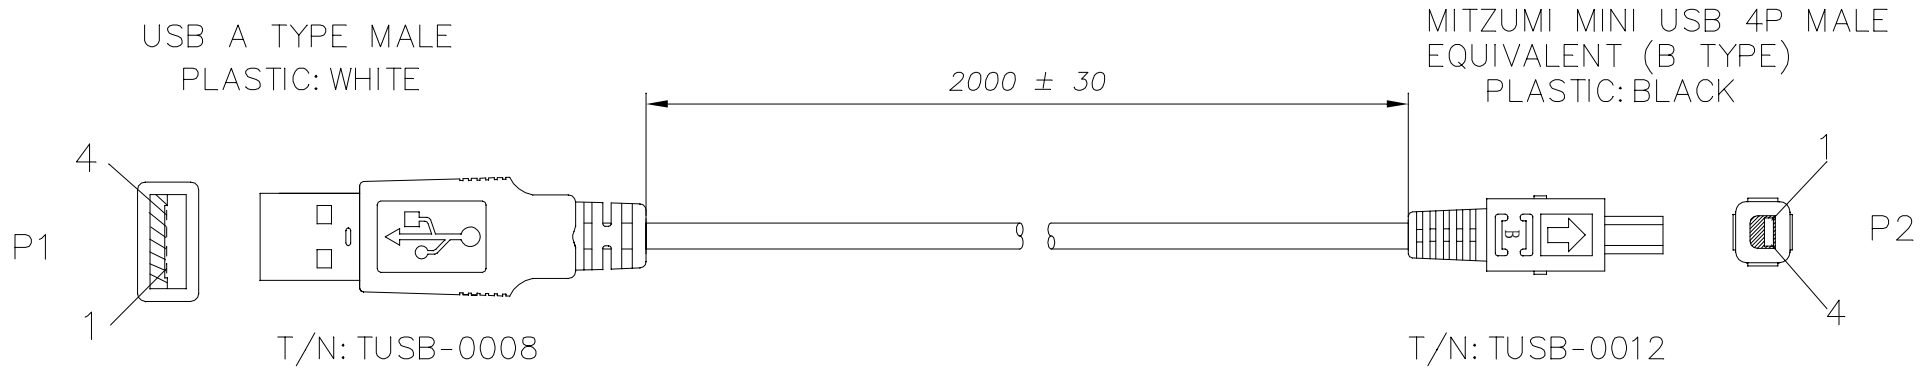

NOTES:

1.CABLE:

UL-20276 28AWG*2C+28AWG*1PR+AL-FOIL/MYLAR
+SPIRAL PVC JACKET (90P) OD: 3.5±0.15mm
COLOR: BLACK(NK-K01)

2.CONNECTORS:

P1:USB A TYPE MALE GOLD FLASH CONTACT
NICKEL PLATED SHELL.

P2:(MITZUMI)MINI USB 4P MALE EQUIVALENT (B TYPE)
GOLD FLASH CONTACT NICKEL PLATED SHELL.

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01)

4.TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3 MAX.
- <3>.INSULATION RESISTANCE 20M MIN.

5.PACKING:EACH PC / PE POLYBAG

	P1		P2
RED	1	_____	1
WHITE	2	_____	2
GREEN	3	_____	3
BLACK	4	_____	4
		SHELL _____	SHELL

Tolerance	Inch	M/M			
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
Draw			Title		
Keven 12/18			USB A (M) -MINI USB 4P (M) CABLE		
			Customer P/N		
Check			App'd	Customer	E-SSM
Engr			Scale	NONE	Units
			m/n	Third Angle Projection	Sheet 1/1
			Dwg No. 170-5xxx	REV: X	Sheet 1/1