



ADDERLINK IP

Secure Internet or dial-up access to your computers or servers for 24/7 global control.

Providing remote Keyboard, Video and Mouse access via IP to your current KVM switch, the AdderLink IP allows management of computers from anywhere in the world securely and remotely via the Internet, VPN, dial-up link or corporate network.



The AdderLink IP doesn't need any software to be loaded on your servers and is easy to set up and use. The AdderLink IP supports the Real VNC client software that, unlike HTTPS web browsers, is specifically designed for secure, high performance KVM via IP applications. The AdderLink IP integrates with your existing KVM infrastructure for a cost effective global management tool.

FEATURES

Independent operation

Gives full control even during boot up, BIOS level or computer crash states. The AdderLink IP will work even if the controlled devices are not.

High video performance

The AdderLink IP can use a standard web browser but for superior graphical performance Real VNC is used. Free of the limitations of HTTPS, Real VNC greatly enhances video performance.

Security


Employing enterprise grade security (using AES 128 bit encryption and RSA 2048 bit public key authentication) as standard, the AdderLink IP is further enhanced by the use of Real VNC, allowing for the creation of ciphered user communications.

User management

Knowing who does what and when is crucial for any remote access service. The AdderLink IP can create up to 16 user profiles each defines user access rights. Each user's activity is recorded and time stamped. The resulting log can be exported for historical review.

Power control

When attached computers crash or require resetting often the only solution is to power them off and back on again. The AdderLink IP allows for the integration of power switching devices that can be control through the user interface.

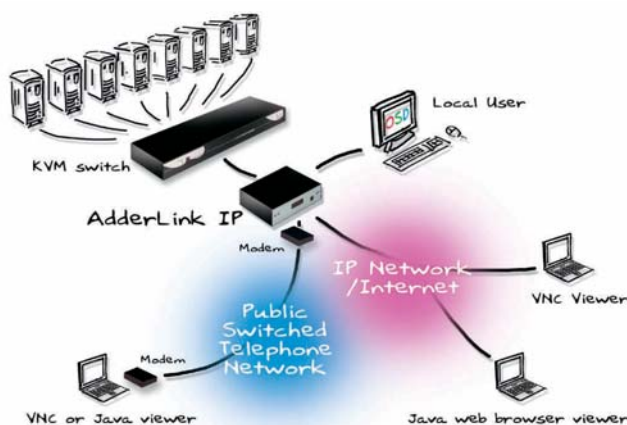

ADDERLINK IP



Secure Internet or dial-up access to your computers or servers for 24/7 global control.

TECHNICAL SPECIFICATIONS

Video resolutions	Supports standard PC, Sun and Mac video modes up to resolutions of 1600x1200 with scalable viewer
Hardware compatibility	Supports PC, RS/6000, Alpha and SGI computers using PS/2 or Sun (USB and 8-pin styles) and Mac (USB) when using the appropriate CCUSB/CCSUN interface cables. Compatible with most KVM switches
O/S compatibility	All known software and operating systems including Windows (all), DOS, Linux, Unix, BSD, Sun OS, Solaris, Mac OS, NetWare etc.
AdderLink IP to KVM/computer connection	Video: HDD15 Keyboard/Mouse: MiniDin6. 1m 3-in-1 cable supplied
Local console	Video: HDD15 Keyboard/Mouse: MiniDin6
Connections	Ethernet: RJ45 10/100 autosensing Serial: 2 x DB9
Physical design	1U compact case, robust metal construction 198mm/7.92" (w), 44mm/1.76" (h), 120mm/4.8" (d), 0.75kg/1.65lbs 1 per 1U or 2 per 1U rack mount kits available
Power supply	100-240VAC, 50-60Hz
Operating temperature	0°C to 40°C / 32°F to 104°F
Approvals	CE, FCC

Local, Remote and Global Computer Control



Distribution:

U.T.E. Electronic GmbH & Co. KG

58454 Witten (Germany) - Friedrich-Ebert-Str.112a

Tel.: +49 (0)2302 982035 - E-Mail:info@ute.de - Internet:www.ute.de

All trademarks acknowledged. Specifications subject to change without notice.
DS/ALIP-02/07