
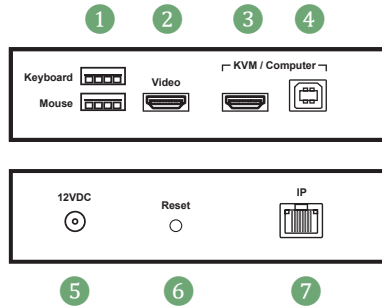


IP-H101 1 port IP 1080 HDMI KVM Gateway



- 1 USB-A to Keyboard & Mouse
- 2 HDMI Output to Monitor
- 3 HDMI to KVM Switch / Computer
- 4 USB-B to KVM Switch / Computer
- 5 12VDC Power Input
- 6 Reset
- 7 1000 BaseT Gigabit Ethernet Port

KVM Port

Connector :	HDMI 1.4 + USB-B (Video + KB / MS)
Connectivity :	6 ft HDMI KVM cable (CH-6H)
Resolution :	16 : 9 - max. 1920 x 1080 16 : 10 - max. 1920 x 1200 4 : 3 - max. 1600 x 1200

Local Console

Keyboard / Mouse :	2 x USB-A
Video :	1 x HDMI 1.4
Resolution :	16 : 9 - max. 1920 x 1080 16 : 10 - max. 1920 x 1200 4 : 3 - max. 1600 x 1200

IP Console

Connector :	1000 BaseT Gigabit Ethernet Port (RJ45)
User management :	1 x active user, 15-user login
Network protocol :	DHCP / BOOTP / DNS
Security :	TLS 1.3, AES, LDAP, Active Directory (AD), HTTP(s)
Browser :	Chrome, Firefox, Edge, etc.
Resolution :	16:9 - max. 1920 x 1080 16:10 - max. 1920 x 1200 4:3 - max. 1600 x 1200

Power

Input	12V Power Adapter
Consumption	Max. 11W

Physical

Product (W x D x H)	125 x 125 x 30 mm 4.92 x 4.92 x 1.18 inch
Packing (W x D x H)	- mm - inch
Weight	Net - kg / - lb
	Gross - kg / - lb
Chassis color	Dark
Chassis materials	Steel

Compliance


EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	RoHS3 & REACH

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20 to 90%, non-condensing
Storage humidity	5 to 90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	5~500Hz 1G RMS random vibration



Connection to HDMI KVM

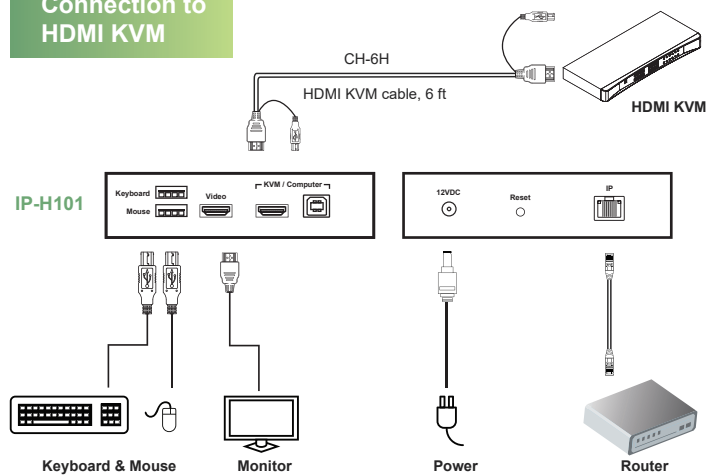

Connection to Computer

