
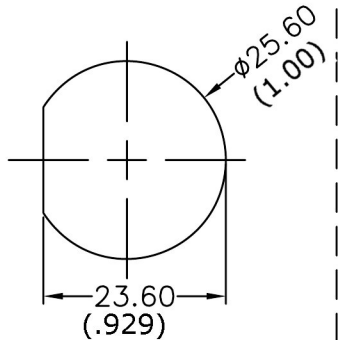
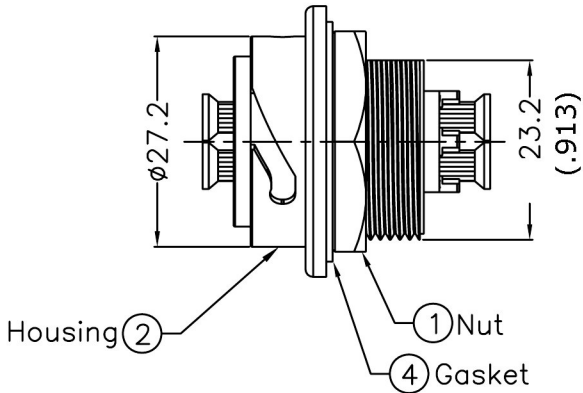



# FIBER-D-LC-WTP-CS

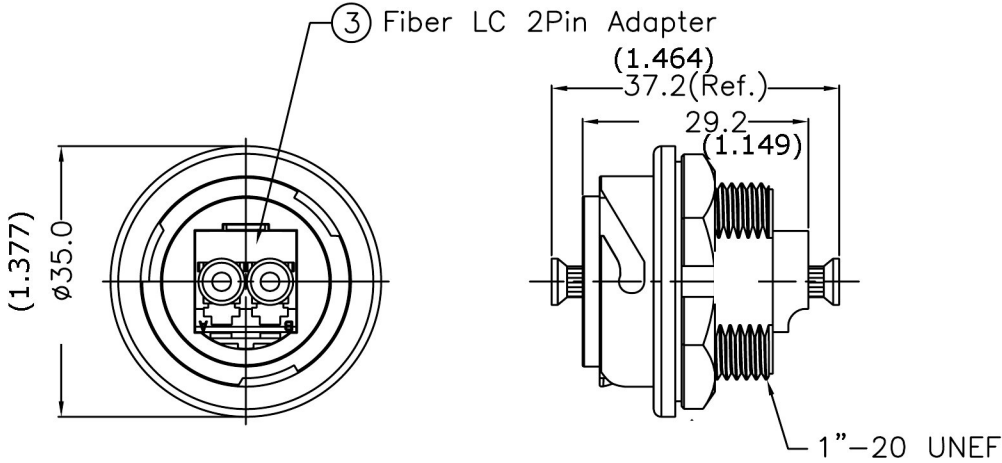

Recommended Panel Cut-Out

- Note:
- \* Waterproof Rate: IP67
  - \* Nut: Nylon+GF UL94V-0,,Black
  - \* Housing: PPO UL94V-0,Black
  - \* Fibre Adapter: LC 2P Adapter
  - \* Gasket: Silicone UL94V-0,Gray
  - \* For Panel Thickness Max 4.0mm
  - \* Recommend Force : 8~10kg-cm

UNIT:mm (Inch)

TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°