

1 2 3 4 5 6 7

ROHS Compliant

Part #: RJ45-6WTP-CS-JCK

Features :






- RJ45 complies with FCC part 68 standard
- Jack insertion life >750 mating cycles
- Operating temperature : 14°F~140°F
- Storage temperature : -40°F~154°F

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max. 0.1 ohm
- Insulation Resistance : 500M ohm
- Dielectric withstanding voltage : 1000V

IP67 :

- ACCORDING TO IEC 60529 : 2001-02
- Degrees of Protection :
- #6 : Totally protected against dust
- #7 : Protected against the effect of temporary immersion for 30 min. in 1-meter depth of water

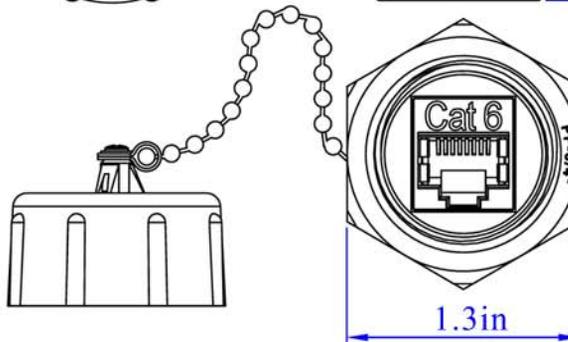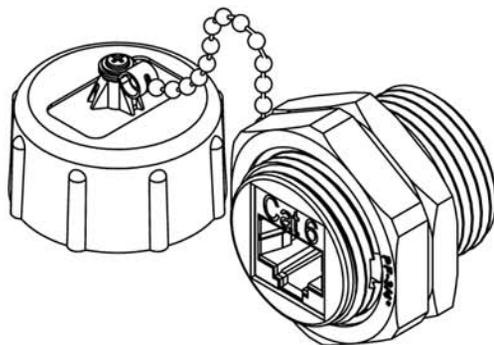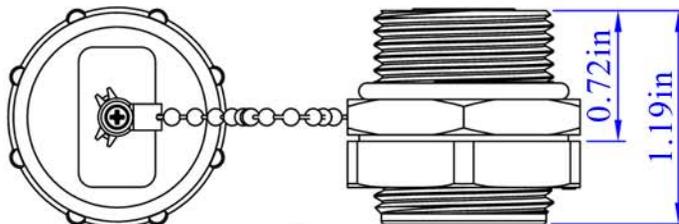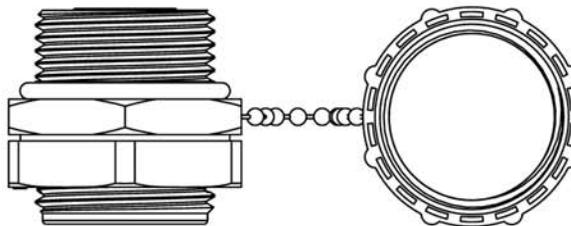

TECHNICAL DATA

CATEGORY	<input type="checkbox"/> CAT.5E <input checked="" type="checkbox"/> CAT.6 <input type="checkbox"/> CAT.3 <input type="checkbox"/> OTHER _____
HOUSING	ABS UL94V-0
CONTACT	0.02 in DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	<input type="checkbox"/> 0.0762 um / 3u inch <input type="checkbox"/> 0.15 um / 6u inch <input type="checkbox"/> 0.38 um / 15u inch <input type="checkbox"/> 0.76 um / 30u inch <input checked="" type="checkbox"/> 1.27 um / 50u inch
COLOR	<input type="checkbox"/> WHITE <input checked="" type="checkbox"/> BLACK <input type="checkbox"/> GREEN <input type="checkbox"/> BLUE <input type="checkbox"/> YELLOW <input type="checkbox"/> RED <input type="checkbox"/> ORANGE <input type="checkbox"/> IVORY <input type="checkbox"/> OTHER _____
TYPE OF PRODUCT	<input type="checkbox"/> UNSHIELD <input checked="" type="checkbox"/> SHIELD : 0.01 in THICKNESS COPPER ALLOY WITH NICKLE PLATED
MAIN BODY	PBT UL94V-0, 15% GLASS FIBER FILLED