



| P/N            | L        |
|----------------|----------|
| HD-WTP-WMRM-2M | 2000±100 |
| HD-WTP-WMRM-5M | 5000±200 |

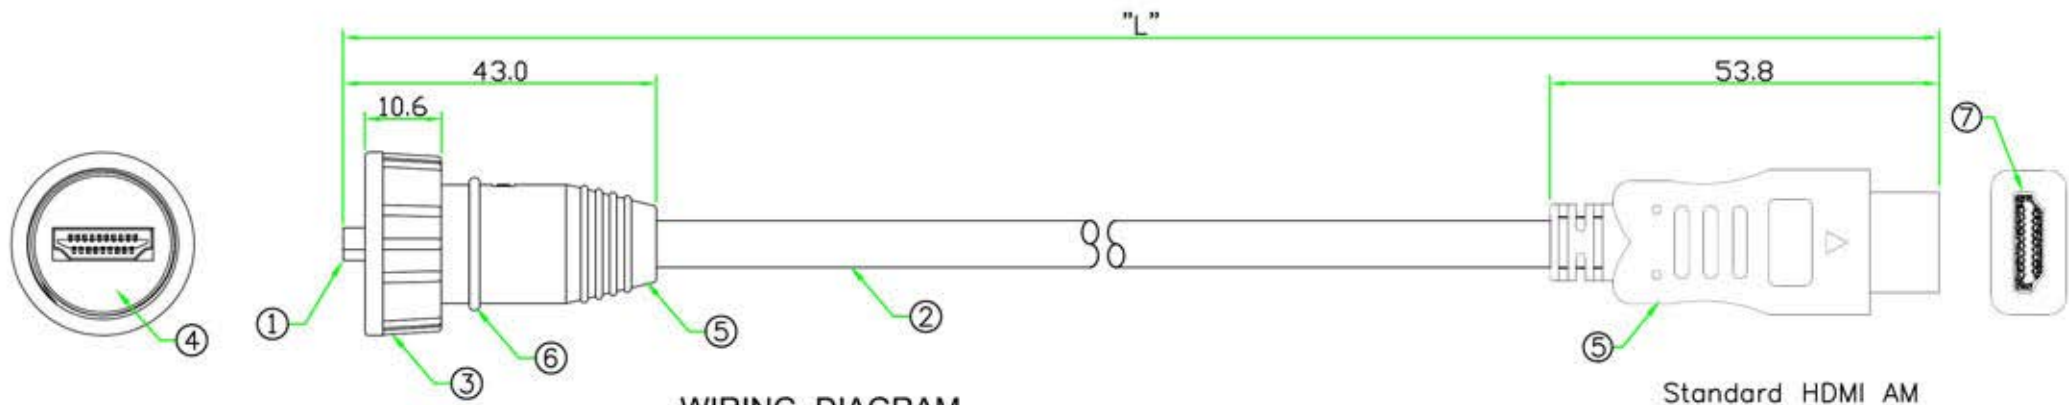


(IP66-68)

## WIRING DIAGRAM

Standard HDMI AM




HDMI A 19M

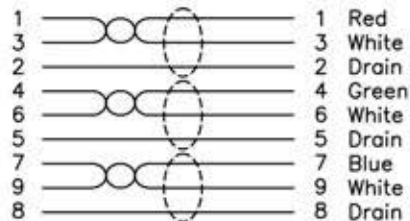

HDMI A 19M

HDMI A 19M

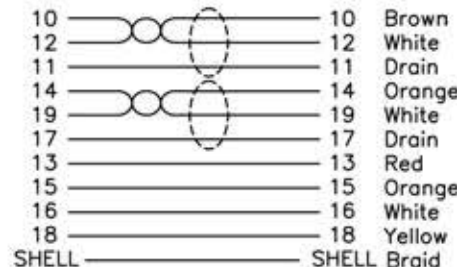

HDMI A 19M

|                                        |            |
|----------------------------------------|------------|
|                                        | UNIT: mm   |
| SCALE                                  | 1:1        |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: |            |
| .x ± 0.5                               | .xx ± 0.25 |
| .xxx ± 0.1                             | ANGLE ± 1° |

| 7   | CONNECTOR   | HDMI A 19P MALE SOLDER CONNECTOR. 15u" Gold Plating.       |       | 1    |
|-----|-------------|------------------------------------------------------------|-------|------|
| 6   | O-RING      | EPDM.                                                      | BLACK | 1    |
| 5   | OVER MOLDED | PVC                                                        | BLACK | 2    |
| 4   | GASKET      | RUBBER                                                     | BLACK | 1    |
| 3   | SCREW NUT   | NYLON+GF.                                                  | BLACK | 1    |
| 2   | CABLE       | UL20276 (30AWGx1P+D)x5C + 30AWGx4C + Al/My+Braid OD: 6.5mm | BLACK | 1    |
| 1   | CONNECTOR   | HDMI A 19P Male solder connector. Gold flash.              |       | 1    |
| No. | PART NAME   | DESCRIPTION                                                | COLOR | Q'TY |