

USB3A-WTP-QR-CS-JCK

Specifications:

Contact Resistance: <30mΩ

Dielectric Withstanding Voltage: 1000V/AC

Insulation Resistance: >500MΩ

Durability: >500mating cycles

Receptacle Housing: PBT, Black

Overmolding: PVC, Black

Contact: Copper Alloy

Coupling Ring: PA66, Black

Operating Temperature: -40°C ~80°C

Performance: USB 3.0 or 2.0

Industrial Seal Rating: IP67





Dimensions:


(Shown with USB3A-WTP-QR-1M-MM)



USB3A-WTP-QR-CS-JCK

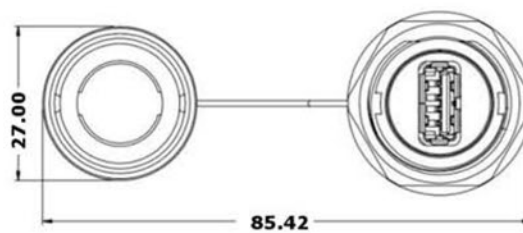

Installation hole figure

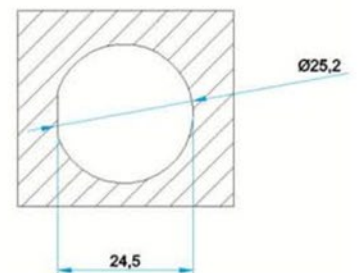

Note: For a proper seal, the rubber gasket (included) must be placed on the inside of the mounting panel.

Units: Millimeters

