


2750±50(8F)

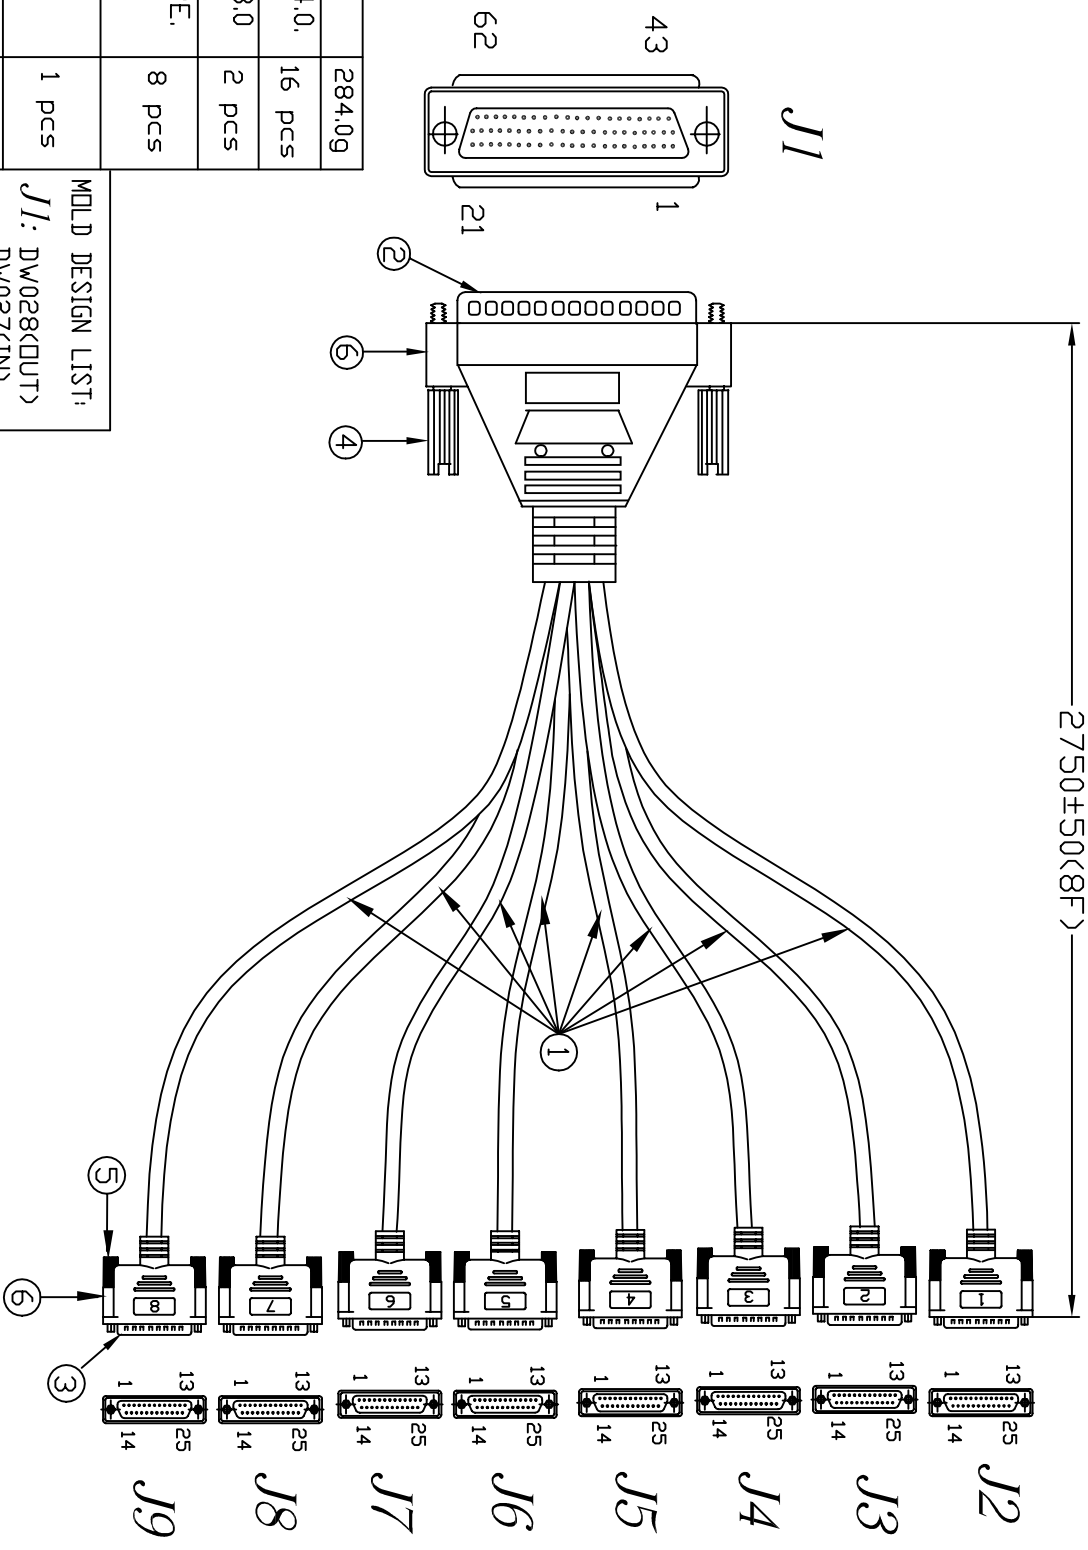

BILL OF MATERIAL

⑥	45P PVC, BLACK COLOR.	284.0g
⑤	THUMB SCREW: UNC#4-40, AG4*24.0, BLACK COLOR MOLDING.	16 pcs
④	THUMB SCREW: UNC#4-40, AD4*23.0 BLACK COLOR MOLDING.	2 pcs
③	D-SUB 25P MALE SOLDERING TYPE, INSULATION: PBT, BLACK COLOR, CONTACT: BRASS, GOLD FLASH.	8 pcs
②	HDB 62P MALE SOLDERING TYPE, INSULATION: PBT, BLACK COLOR, CONTACT: BRASS, GOLD FLASH.	1 pcs
①	NON-UL 28AWG*8C+DRAIN+AL FOIL, CABLE OD: 5.0mm, JACKET BLACK COLOR.	2750mm*8

MOLD DESIGN LIST:  
**J1:** DW028(OUT)  
 DW027(IN)  
**J2 TO J9:**  
 DW157(OUT)  
 DW069(IN)

REVISION LIST		DRAWG BY	Q'TY
REV	DESCRIPTION	DATE	
A	INITIAL RELEASE OF DWG	ACT.03.2001	CHECK BY
			APPROVED BY

TOLERANCE: .XX=	.XXX=
SCALE: NONE	UNIT: mm

PART NO: S048372	DWG NO: CK110003	REV: A
CUST NO:		
TITLE :	HDB62M/DB25M*8	
	SHEET 1 OF 1	